



# Our World of Fibers Product overview







location



# Some facts about us

OBERON GmbH Fiber Technologies is one of global leading manufacturers of laser surgery fibers as well as special optic components for medical devices and produces exclusively in Germany. As a certified medical device manufacturer our products are distributed nearly all over the world and we continuously extend our global sales structure.

customers worldwide

# 182

We commit ourselves to precision, reliability and customer satisfaction

shipped units in 2023

# 5K

# 5K

# 5K

# 5K

production area

# >1600m<sup>2</sup>

modular ISO class-7 cleanroom

# 102 m<sup>2</sup>

design and production exclusively in

# Wildau, Germany

assembling operators

# 34

state of the art production equipment and technology

experience

# 20 Years

Since the strategic spin-off from LEONI Fiber Optics in 2013 we perfectly combine over 15 years experience in the manufacturing of optical fibers with the flexibility of a highly specialized, local SME. Over the last 9 years there has been implemented a comprehensive quality management system, which allows us to offer our customers not only products but a full range of services.

regulatory compliance worldwide

# Our Compliance is the key to your success



We demand the highest quality of ourselves, and our clients demand it of us. That is why our quality management system conforms to ISO 13485 and ISO 9001 requirements. As a certified medical device manufacturer, OBERON holds all needed certification for the design, development and distribution of medical devices. The conformity of our products has been confirmed by our notified body, so that we can provide devices with ce marking.

key certifications



common solutions and mutual benefits

- long experience combined with current knowledge
- practical solutions for a role as subcontractor
- assistance in preparing relevant documentation
- timely support with local registrations
- recognized validation documents
- Audit support - both from the client or their certifier

research and development

# We transform customer needs into precise solutions

Together with a strong network of scientific partners and universities we continuously push developments and always try to find innovative solutions for our customers needs. In various project OBERON successfully developed fibers which allow clinical specialist to enter new fields of application leading to better regeneration of patients, less pain and improved effectiveness of treatments.


InCone

Purpose: Development of a process for laser structuring of distal ends as well as caps for extended application areas in minimally invasive medicine

UroMed

Purpose: Raman-spectroscopy based Diagnostic Fiber Probe in Urology

projects in cooperation with






General Laser Surgery Fibers

# Disposable Laser Surgery Fibers

(all Silica)

| Core | Clad | Total Diameter | Description              |
|------|------|----------------|--------------------------|
| 200  | 240  | 420            | Laser Surgery Fiber 200  |
| 272  | 300  | 420            | Laser Surgery Fiber 272  |
| 365  | 400  | 580            | Laser Surgery Fiber 365  |
| 400  | 440  | 800            | Laser Surgery Fiber 400  |
| 550  | 600  | 750            | Laser Surgery Fiber 550  |
| 600  | 660  | 890            | Laser Surgery Fiber 600  |
| 800  | 840  | 1200           | Laser Surgery Fiber 800  |
| 1000 | 1100 | 1400           | Laser Surgery Fiber 1000 |

→ dimensional data in  $\mu\text{m}$

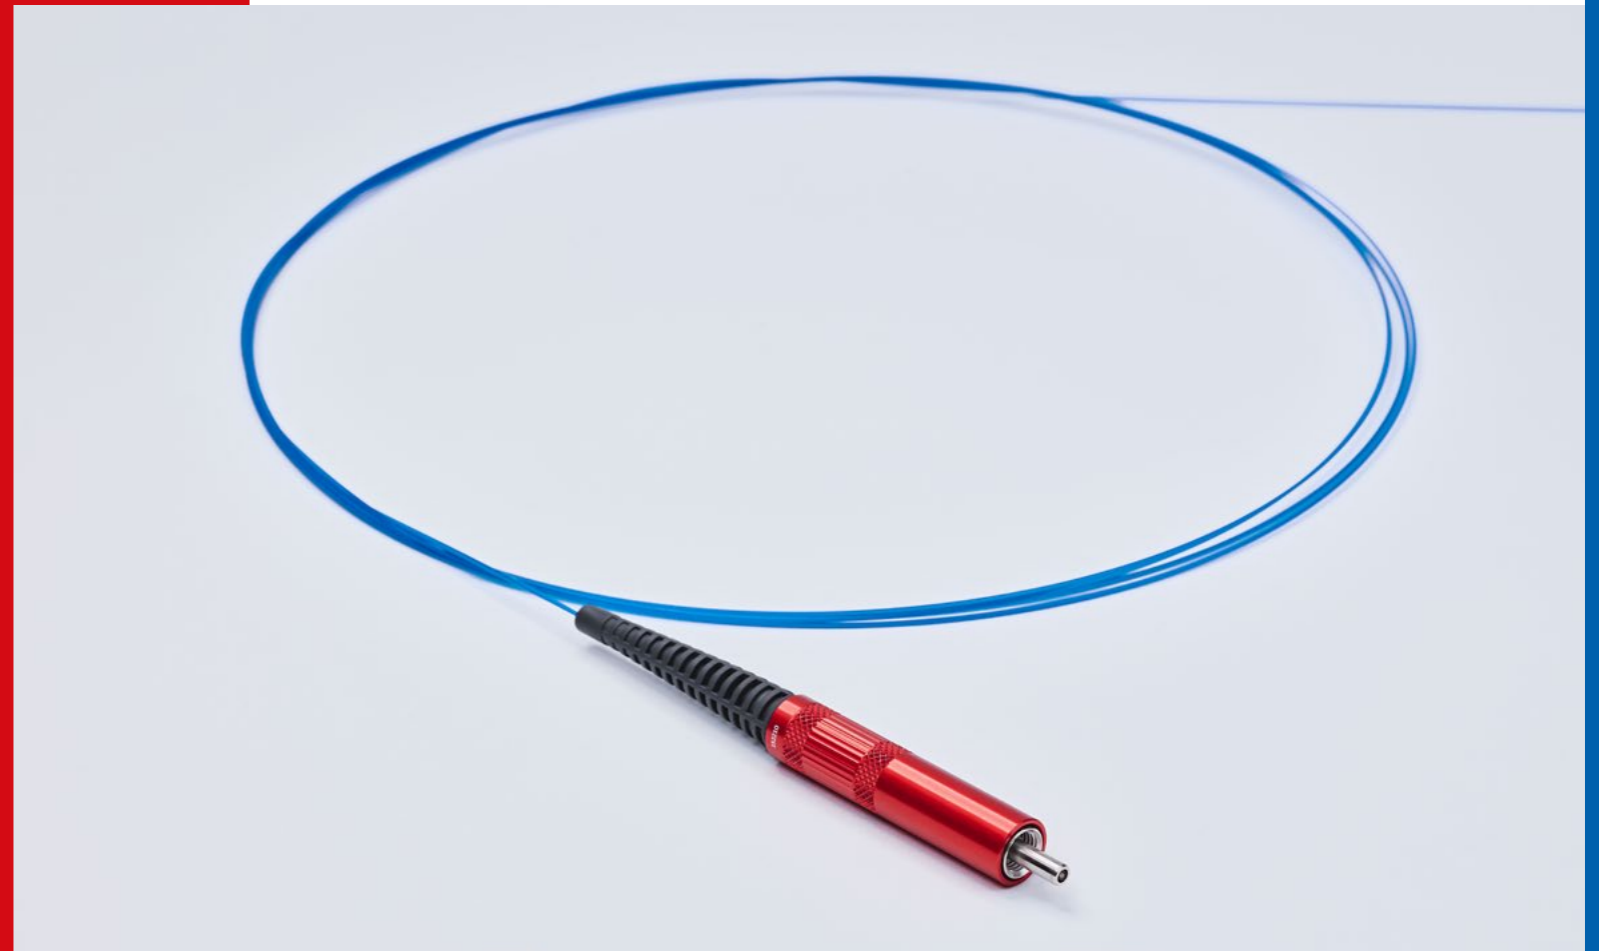


### Laser Surgery Fibers for single use in various surgical applications

- pure silica fiber with highest resistance against laser damages
- NA = 0.22
- applicable for 400nm up to 2200nm
- standard length 3m
- ready to use in double sterile pouch (EO sterilized)
- standard blue polymer Jacket / Buffer (ETFE - Tefzel)
- freestanding SMA 905 connector with optional extension sleeve
- standard shelf life 24 month

### Available customized features

- customer-specific RFID capsules
- F-SMA extension sleeves in various colours and characteristics
- laser engraving on extension sleeves
- shrink tubes with laser engraved additional information
- various lengths and diameters
- higher numerical apperature (e.g. 0.26)
- alternative buffer materials possible (e.g. Nylon)
- customized connector designs possible
- alternative connector designs like e.g. DIN, FC/PC
- accessories like strippers and cleavers
- LUER adapter male or female for catheter connection available

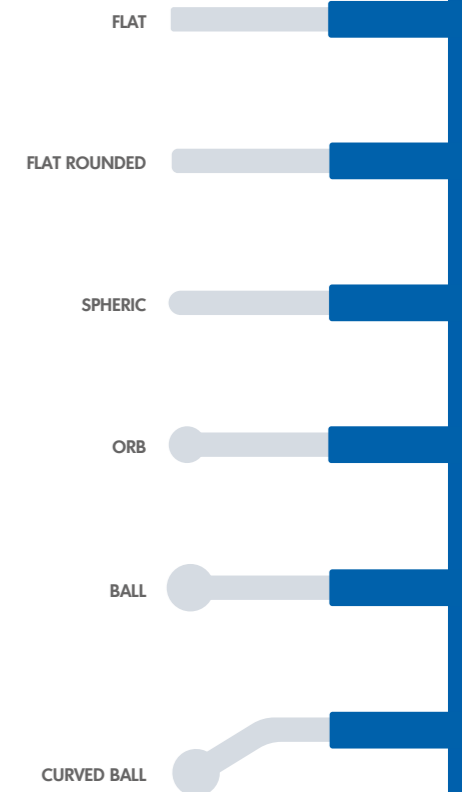


According to the individual needs of single applications a wide range of specialized tip designs is available.

Reusable Laser Surgery Fibers

# Reusable Laser Surgery Fibers

(all Silica)

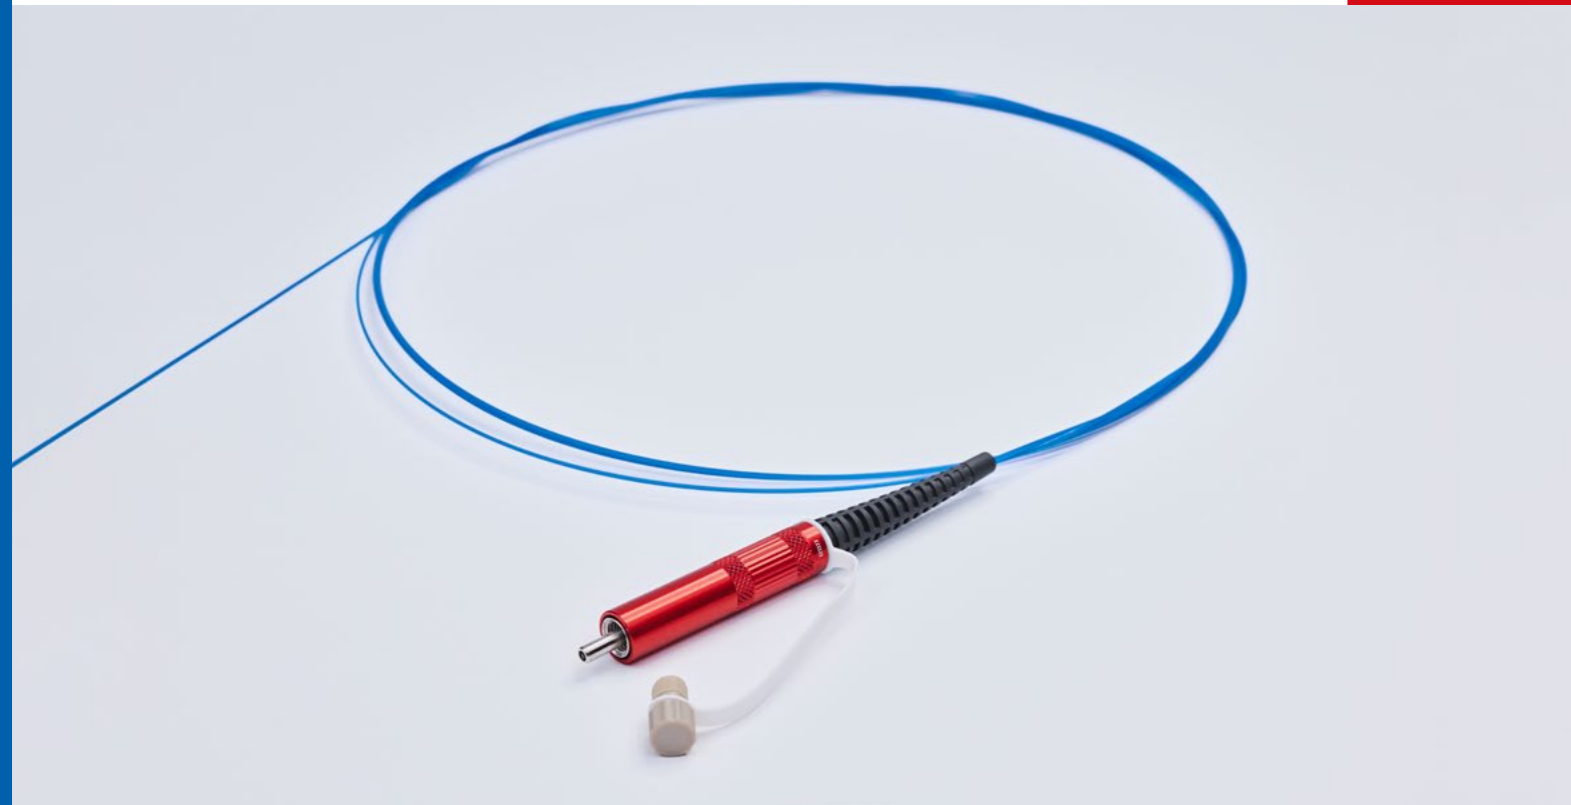

→ dimensional data in  $\mu\text{m}$


| Core | Clad | Total Diameter | Description              |
|------|------|----------------|--------------------------|
| 200  | 240  | 420            | Laser Surgery Fiber 200  |
| 272  | 300  | 420            | Laser Surgery Fiber 272  |
| 365  | 400  | 580            | Laser Surgery Fiber 365  |
| 400  | 440  | 800            | Laser Surgery Fiber 400  |
| 550  | 600  | 750            | Laser Surgery Fiber 550  |
| 600  | 660  | 890            | Laser Surgery Fiber 600  |
| 800  | 840  | 1200           | Laser Surgery Fiber 800  |
| 1000 | 1100 | 1400           | Laser Surgery Fiber 1000 |

### Reusable Laser Surgery Fibers for multiple use in various surgical applications

- 10 Times reusable and approved for Re-Sterilisation with fractional vacuum or gravity method and steam steriliser according to DIN EN 13060 or DIN EN 285
- pure synthetic fused silica glass core with highest resistance against laser damages
- NA = 0.22
- applicable for UV 532nm and IR up to 2200nm
- standard length 3m
- special PEEK protection cap with loss prevention
- ready to use in double sterile pouch (EO sterilized)
- standard polymer coating blue tefzel, special coatings like silicone or nylon upon request
- freestanding SMA 905 connector with optional extension sleeve
- standard shelf life 24 month

### Available customized features

- customer-specific RFID capsules
- F-SMA extension sleeves in various colours and characteristics
- laser engraving on extension sleeves
- shrink tubes with laser engraved additional information
- LUER adapter male or female for catheter connection available
- various lengths and diameters
- accessories like strippers and cleavers
- higher numerical apperture (e.g. 0.26)

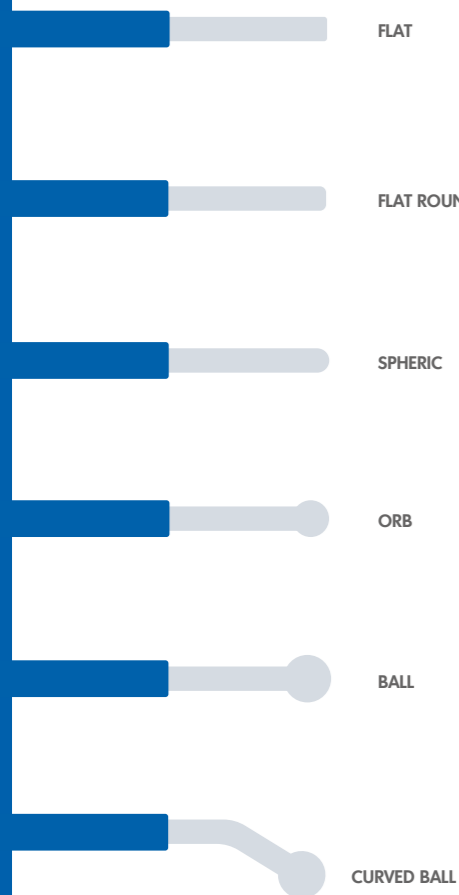

According to the individual needs of single applications a wide range of specialized tip designs is available.

# Disposable Hardclad Barefibers

| Core | Clad | Total Diameter | Description             |
|------|------|----------------|-------------------------|
| 200  | 220  | 420            | Laser Surgery Fiber 200 |
| 400  | 430  | 730            | Laser Surgery Fiber 400 |
| 600  | 630  | 950            | Laser Surgery Fiber 600 |

→ dimensional data in  $\mu\text{m}$

## Disposable Laser Surgery Fibers for single use in various surgical applications

- hard plastic clad silica composition as affordable alternative solution to all silica fibers
- NA = 0.37
- standard SMA 905 connector with optional extension sleeve
- power transmission up to 40W depending on core diameter
- applicable for 400nm up to 1940nm
- standard length 3m
- ready to use in double sterile pouch (EO sterilized)
- standard transparent polymer Jacket / Buffer (ETFE - Tefzel)
- standard shelf life 24 month


## Available customized features

- customer-specific RFID capsules
- F-SMA extension sleeves in various colours and characteristics
- laser engraving on extension sleeves
- shrink tubes with additional information
- LUER adapter male or female for catheter connection available
- various lengths and diameters
- accessories like strippers and cleavers
- alternative buffer materials possible (e.g. Nylon)






According to the individual needs of single applications a wide range of specialized tip designs is available.

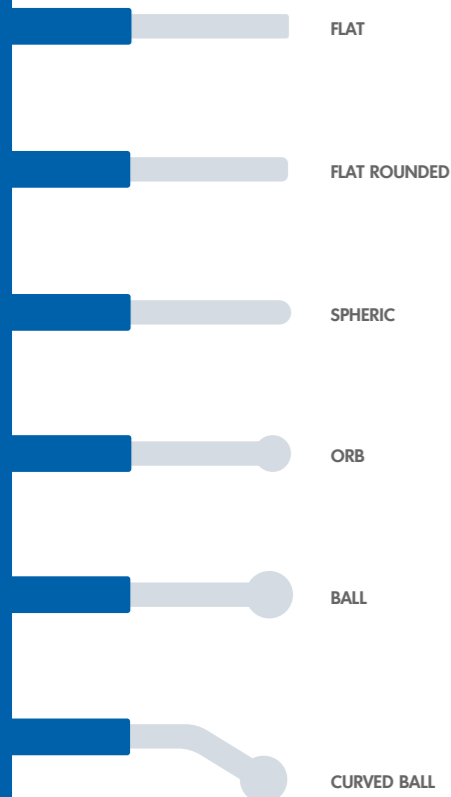

- Laser Surgery Fibers for pulsed laser applications**
- pure silica fiber with highest resistance against laser damages
  - NA = 0.22
  - special freestanding Holmium connector for high power applications and pulsed laser mode
  - optional extension sleeve
  - applicable for 400nm and up to 2200nm
  - standard length 3m
  - ready to use in double sterile pouch (EO sterilized)
  - standard blue polymer Jacket / Buffer (ETFE - Tefzel)
  - standard shelf life 24 month
  - available as 10 times reusable product

- Available customized features**
- customer-specific RFID capsules
  - F-SMA extension sleeves in various colours and characteristics
  - laser engraving on extension sleeves
  - shrink tubes with laser engraved additional information
  - LUER adapter male or female for catheter connection available
  - various lengths and diameters
  - higher numerical apperture (e.g. 0.26)
  - alternative buffer materials possible (e.g. Nylon)
  - accessories like strippers and cleavers

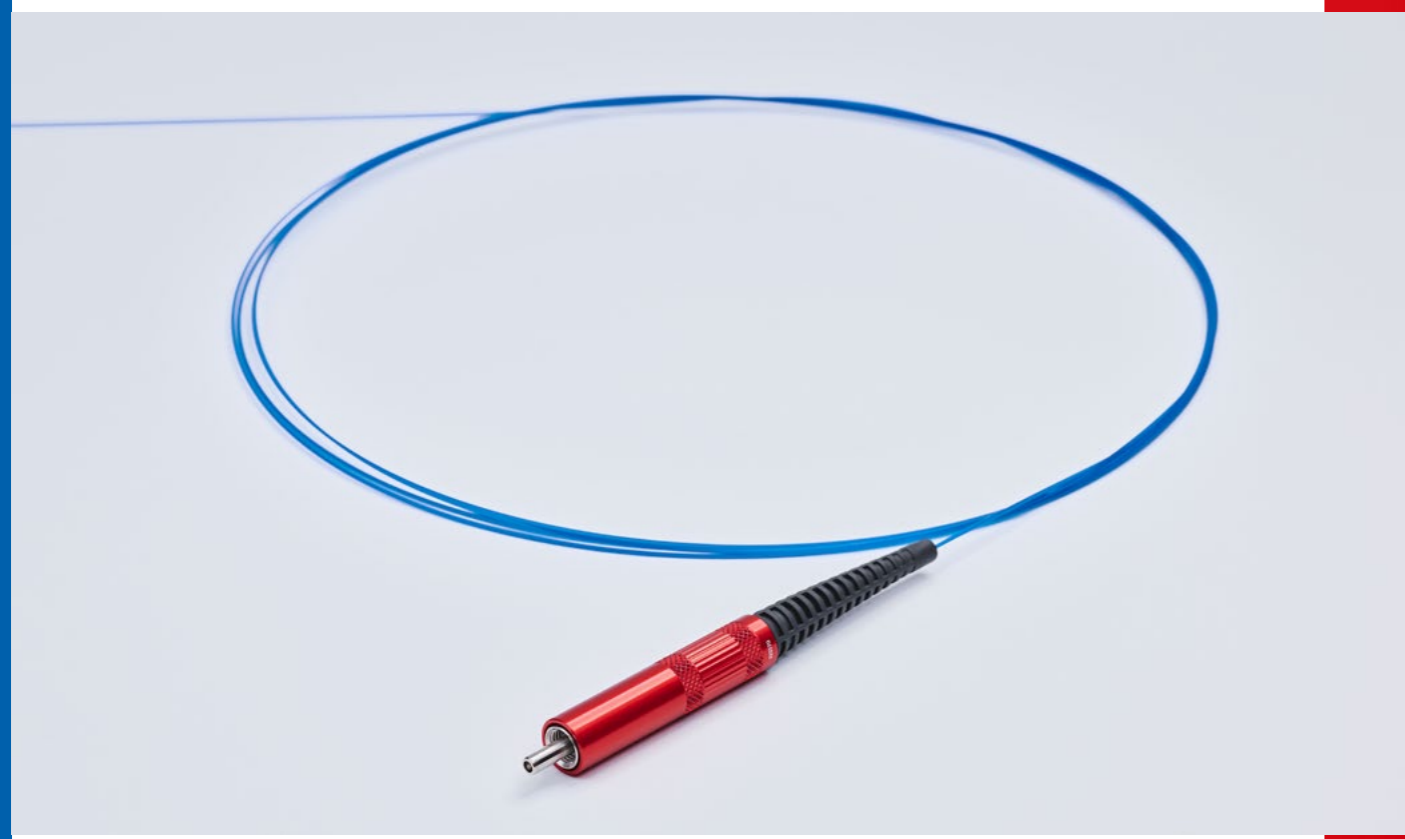

General Laser Surgery Fibers

# Disposable Holmium Laser Surgery Fibers

(all Silica)



→ dimensional data in μm

| Core | Clad | Total Diameter | Description              |
|------|------|----------------|--------------------------|
| 200  | 240  | 420            | Laser Surgery Fiber 200  |
| 230  | 276  | 430            | Laser Surgery Fiber 230  |
| 272  | 300  | 420            | Laser Surgery Fiber 272  |
| 365  | 400  | 580            | Laser Surgery Fiber 365  |
| 400  | 440  | 800            | Laser Surgery Fiber 400  |
| 550  | 600  | 750            | Laser Surgery Fiber 550  |
| 600  | 660  | 890            | Laser Surgery Fiber 600  |
| 800  | 840  | 1200           | Laser Surgery Fiber 800  |
| 1000 | 1100 | 1400           | Laser Surgery Fiber 1000 |

Radial Fibers

# Disposable Radial Emission Fibers



## Laser Surgery Fibers for single use in Endovenous Laser Therapy

- clearly shaped ring emission for best results in tissue contact
- pure silica fiber with highest resistance against laser damages
- NA = 0.22
- standard SMA905 connector optimized for Diode lasers
- optional extension sleeve
- applicable for 810nm up to 1940nm
- standard length 2,6m
- special laser engraved length marking for better allocation in the vein and safe use with available introducers
- atraumatic tip design with glass capillary
- available in glued and fused design
- ready to use in double sterile pouch (EO sterilized)
- standard white polymer Jacket / Buffer (ETFE - Tefzel)
- standard shelf life 24 months


### Available customized features

- customer-specific RFID capsules
- SMA905 extension sleeves in various colours and characteristics
- laser engraving on extension sleeves
- shrink tubes with laser engraved additional information
- customized connector designs possible
- alternative connector designs like e.g. DIN, FC/PC
- LUER adapter male or female for catheter connection available



| Core | Clad | Total Diameter | Diameter Capillary | Standard material code | Description                                                 |
|------|------|----------------|--------------------|------------------------|-------------------------------------------------------------|
| 400  | 420  | 950            | 1000               | 270050S                | Laser Surgery Fiber -<br>Radial Emission Fiber 400µm        |
| 550  | 578  | 1300           | 1800               | 270088S                | Laser Surgery Fiber -<br>Diffuse Emission Fiber 600µm       |
| 400  | 420  | 950            | 1000               | 270142S                | Laser Surgery Fiber -<br>Fused Radial Emission Fiber 400µm  |
| 550  | 578  | 1300           | 1800               | 270130S                | Laser Surgery Fiber -<br>Fused Diffuse Emission Fiber 600µm |
| 550  | 578  | 1300           | 1550               | 270175S                | Laser Surgery Fiber -<br>Slim Radial Emission Fiber 600µm   |
| 365  | 400  | 580            | 800                | 270011S                | Laser Surgery Fiber -<br>Radial Emission Fiber 365µm        |

→ dimensional data in µm

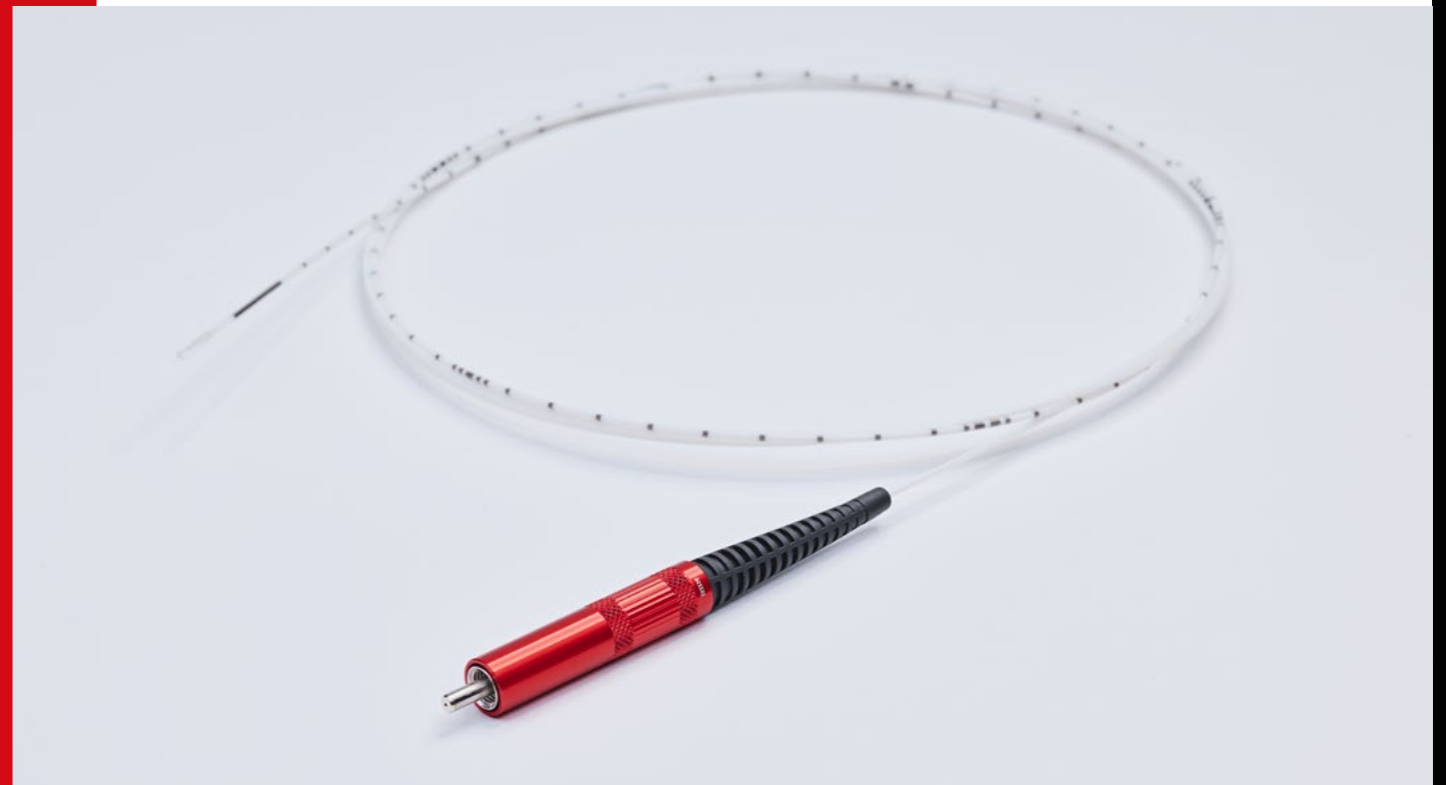



# Disposable Diffuse Emission Fibers

## NEW: Laser Surgery Fibers for single use in Endovenous Laser Therapy

- diffuse light emission through special tip design
- pure silica fiber with highest resistance against laser damages
- NA = 0.22
- standard SMA905 connector optimized for Diode lasers
- optional extension sleeve
- applicable for 810nm up to 1940nm
- standard length 2,6m
- special laser engraved length marking for better allocation in the vein and safe use with available introducers
- atraumatic tip design with glass capillary
- available in glued and fused execution
- ready to use in double sterile pouch (EO sterilized)
- standard white polymer Jacket / Buffer (ETFE - Tefzel)
- standard shelf life 24 month

### Available customized features

- customer-specific RFID capsules
- SMA905 extension sleeves in various colours and characteristics
- laser engraving on extension sleeves
- shrink tubes with laser engraved additional information
- customized connector designs possible
- alternative connector designs like e.g. DIN, FC/PC
- LUER adapter male or female for catheter connection available



| Core | Clad | Total Diameter | Diameter Capillary | Standard material code | Description                                                 |
|------|------|----------------|--------------------|------------------------|-------------------------------------------------------------|
| 400  | 420  | 950            | 1000               | 270167S                | Laser Surgery Fiber -<br>Diffuse Emission Fiber 400µm       |
| 550  | 578  | 1300           | 1800               | 270168S                | Laser Surgery Fiber -<br>Diffuse Emission Fiber 600µm       |
| 400  | 420  | 950            | 1000               | 270183S                | Laser Surgery Fiber -<br>Fused Diffuse Emission Fiber 400µm |
| 550  | 578  | 1300           | 1800               | 270184S                | Laser Surgery Fiber -<br>Fused Diffuse Emission Fiber 600µm |
| 550  | 578  | 1300           | 1550               | 270185S                | Laser Surgery Fiber -<br>Slim Diffuse Emission Fiber 600µm  |

→ dimensional data in µm

Laser Surgery Fibers for Proctology

# Disposable Fistula Fiber Probe



| Core | Clad | Total Diameter | Diameter Capillary | Standard material code | Description                                        |
|------|------|----------------|--------------------|------------------------|----------------------------------------------------|
| 400  | 420  | 950            | 1000               | 270758S                | Laser Surgery Fiber -<br>Fistula Fiber Probe 400µm |

→ dimensional data in µm

## Laser Surgery Fibers for single use in Proctology treatments

- pure silica fiber with highest resistance against laser damages
- NA = 0.22
- special atraumatic capillary for smooth entering into fistula channel
- radial emission of energy for the treatment of inner fistula walls
- standard SMA905 connector optimized for Diode lasers
- optional extension sleeve
- special laser engraved length marking for better allocation in the fistula
- applicable for 810nm up to 1940nm
- standard length 3,0m
- standard white polymer Jacket / Buffer (ETFE - Tefzel)
- ready to use in double sterile pouch (EO sterilized)
- standard shelf life 24 month

## Available customized features

- customer-specific RFID capsules
- SMA905 extension sleeves in various colours and characteristics
- laser engraving on extension sleeves
- shrink tubes with laser engraved additional information
- customized connector designs possible
- alternative connector designs like e.g. DIN, FC/PC
- LUER adapter male or female for catheter connection available





**Laser Surgery Fibers for single use  
in Proctology treatments**

- pure silica fiber with highest resistance against laser damages
- NA = 0.22
- special capillary dome with conical shape for steady positioning within the hemorrhoid-lump
- homogenous distribution of energy within the treated tissue
- standard SMA905 connector optimized for Diode lasers
- optional extension sleeve
- applicable for 810nm up to 1940nm
- standard length 3,0m
- standard white polymer Jacket / Buffer (ETFE - Tefzel)
- equipped with LUER adapter for direct coupling to available handpieces
- ready to use in double sterile pouch (EO sterilized)
- standard shelf life 24 month

**Available customized features**

- customer-specific RFID capsules
- SMA905 extension sleeves in various colours and characteristics
- laser engraving on extension sleeves
- shrink tubes with laser engraved additional information
- alternative buffer materials possible (e.g. Nylon)
- customized connector designs possible
- alternative connector designs like e.g. DIN, FC/PC



Laser Surgery Fibers for Proctology

# Disposable Hemorrhoid Fiber Probe

| Core | Clad | Total Diameter | Diameter Capillary | Standard material code | Description                                        |
|------|------|----------------|--------------------|------------------------|----------------------------------------------------|
| 550  | 578  | 1300           | 1800               | 270504S                | Laser Surgery Fiber - Hemorrhoid Fiber Probe 600µm |

→ dimensional data in µm


**Matching tools for your application**

| Description                                 | Standard material code |
|---------------------------------------------|------------------------|
| Introducer needle cannula 14G - 6 cm length | Z10080                 |
| Opened retractor with seagull wing          | Z10081                 |



Laser Surgery Fibers for Dentistry and Orthopaedics

# Disposable and Reusable Dental and Orthopaedic Surgery Fibers

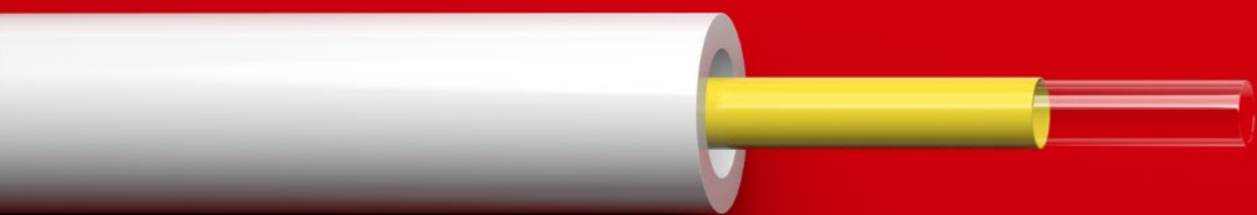

## Disposable or Reusable Laser Surgery Fibers for various applications in Dental Surgery and Orthopaedic applications

- pure silica fiber with highest resistance against laser damages
- NA = 0.22
- thin diameters and heat resistance due to polyimide coating
- standard silicone protection tube with outer diameter of 1,5 or 2,0mm
- distal freestanding fiber for instant use
- homogenous distribution of energy within the treated tissue
- standard SMA905 connector
- optional extension sleeve
- applicable for 400nm up to 2200nm
- standard length 3,0m
- ready to use in double sterile pouch (EO sterilized)
- standard shelf life 24 month

### Available customized features

- customer-specific RFID capsules
- SMA905 extension sleeves in various colours and characteristics
- laser engraving on extension sleeves
- shrink tubes with laser engraved additional information
- higher numerical aperture (e.g. 0.26 up to 0.47)
- customized connector designs possible
- alternative connector designs like e.g. DIN, FC/PC

| Core | Clad | Total Diameter | Standard material code | Description                                                    |
|------|------|----------------|------------------------|----------------------------------------------------------------|
| 114  | 125  | 153            | 230070S                | Laser Surgery Fiber -<br>Dental Surgery Fiber 114µm            |
| 150  | 165  | 195            | 230071S                | Laser Surgery Fiber -<br>Dental Surgery Fiber 150µm            |
| 200  | 220  | 240            | 230080S                | Laser Surgery Fiber -<br>Dental Surgery Fiber 200µm            |
| 320  | 385  | 415            | 230093S                | Laser Surgery Fiber -<br>Dental Surgery Fiber 320µm            |
| 400  | 440  | 480            | 230094S                | Laser Surgery Fiber -<br>Dental Surgery Fiber 400µm            |
| 600  | 660  | 685            | 230095S                | Laser Surgery Fiber -<br>Dental Surgery Fiber 600µm            |
| 200  | 220  | 240            | 230085S                | Laser Surgery Fiber -<br>Dental Surgery Fiber 200µm (reusable) |
| 320  | 385  | 415            | 230086S                | Laser Surgery Fiber -<br>Dental Surgery Fiber 320µm (reusable) |
| 400  | 440  | 480            | 230089S                | Laser Surgery Fiber -<br>Dental Surgery Fiber 400µm (reusable) |
| 600  | 660  | 685            | 230090S                | Laser Surgery Fiber -<br>Dental Surgery Fiber 600µm (reusable) |
| 200  | 240  | 275            | 230034S                | Laser Surgery Fiber -<br>Orthopaedic Surgery Fiber 200µm       |
| 320  | 385  | 415            | 230002S                | Laser Surgery Fiber -<br>Orthopaedic Surgery Fiber 320µm       |

→ dimensional data in µm



**Disposable Laser Surgery Fibers specially designed for Percutaneous Laser Assisted Dissectomy**

- pure silica fiber with highest resistance against laser damages
- NA = 0.22
- thin diameters and heat resistance due to Polyimide coating
- LUER adapter with T-junction for fixation in spinal needle
- 31cm frestanding fiber
- standard silicone protection tube with outer diameter of 1,5 or 2,0mm
- homogenous distribution of energy within the treated tissue
- standard SMA905 connector optimized for Diode lasers
- optional extension sleeve
- applicable for 400nm up to 2200nm
- standard length 3,0m
- ready to use in double sterile pouch (EO sterilized)
- standard shelf life 24 month

**Available customized features**

- customer-specific RFID capsules
- SMA905 extension sleeves in various colours and characteristics
- laser engraving on extension sleeves
- shrink tubes with laser engraved additional information
- higher numerical apperture (e.g. 0.26 up to 0.47)
- customized connector designs possible
- alternative connector designs like e.g. DIN, FC/PC"

Laser Surgery Fibers for Dentistry and Orthopaedics

# Orthopaedic Fiber for PLDD

| Core | Clad | Total Diameter | Standard material code | Description                                              |
|------|------|----------------|------------------------|----------------------------------------------------------|
| 320  | 385  | 415            | 230127S                | Laser Surgery Fiber - Orthopaedic Surgery Fiber for PLDD |
| 400  | 440  | 480            | 230068S                | Laser Surgery Fiber - Orthopaedic Surgery Fiber for PLDD |

→ dimensional data in  $\mu\text{m}$



Fiber Optic cables

# High Power Cables

for demanding laser applications



## Cables designed for high-power applications in aesthetics and industrial fields

- transmission of up to 400W
- highest resistance against laser damages through unique polishing process
- LD80 High Power Connector with or without anti-twist key (SMA 905 on demand)
- pure silica fiber with highest resistance against laser damages
- NA = 0.22
- core diameter up to 1500 $\mu$ m
- fiber centricity < 5 $\mu$ m fiber core to ferrula
- industrial standard and highest resistance against mechanical stress (PVC; Kevlar / PVC; Stainless Steel)
- various coatings for harsh ambient conditions
- various lengths up to 10m
- bending limitation on demand
- laser engraving
- applicable for 400nm up to 2200nm
- individual packaging and easy handling for operator

## Available customized features

- customer-specific RFID capsules
- laser engraving on extension sleeves
- biocompatible shrink tubes with additional information
- mechanical bending limitation
- higher numerical aperture (e.g. 0.26)
- assembly with electrical strands for ready-to-use specs.
- execution with electrical strands / wires for signal transfer





Fiber Optic cables

# Specialty Cables and Bundles

for very demanding applications



## Cables and bundles designed for photonics technology in analytics, optical measurement and sensors

- highest resistance against laser damages thru unique polishing process
- SMA 905; FC/PC, DIN, ST, MTP connector and other customer-specific requirement
- pure silica fiber applicable for 190nm up to 1200nm (High OH)  
or 400nm up to 2200nm (Low OH)
- alternative core designs like e.g. square core available
- NA = 0.22
- applicable for large temperature range up to 300°C
- core diameter up to 1500 $\mu$ m
- industrial standard and highest resistance against mechanical stress  
(PVC; Kevlar / PVC; Stainless Steel)
- various coatings for harsh ambient conditions
- various lengths up to 200m depending on the properties
- bending limitation on demand
- laser engraving
- individual packaging and easy handling for operator
- various geometries and configurations of bundles  
(e.g. square, circular, matrix row, hexagon)
- Option of fiber sorting
- Anti-Reflex coating of both ends

### Available customized features

- lower and higher numerical aperture (e.g. 0.12 or 0.26)
- execution with electrical strands / wires for signal transfer
- alternative fiber properties (single mode fibers)
- simplex or duplex execution



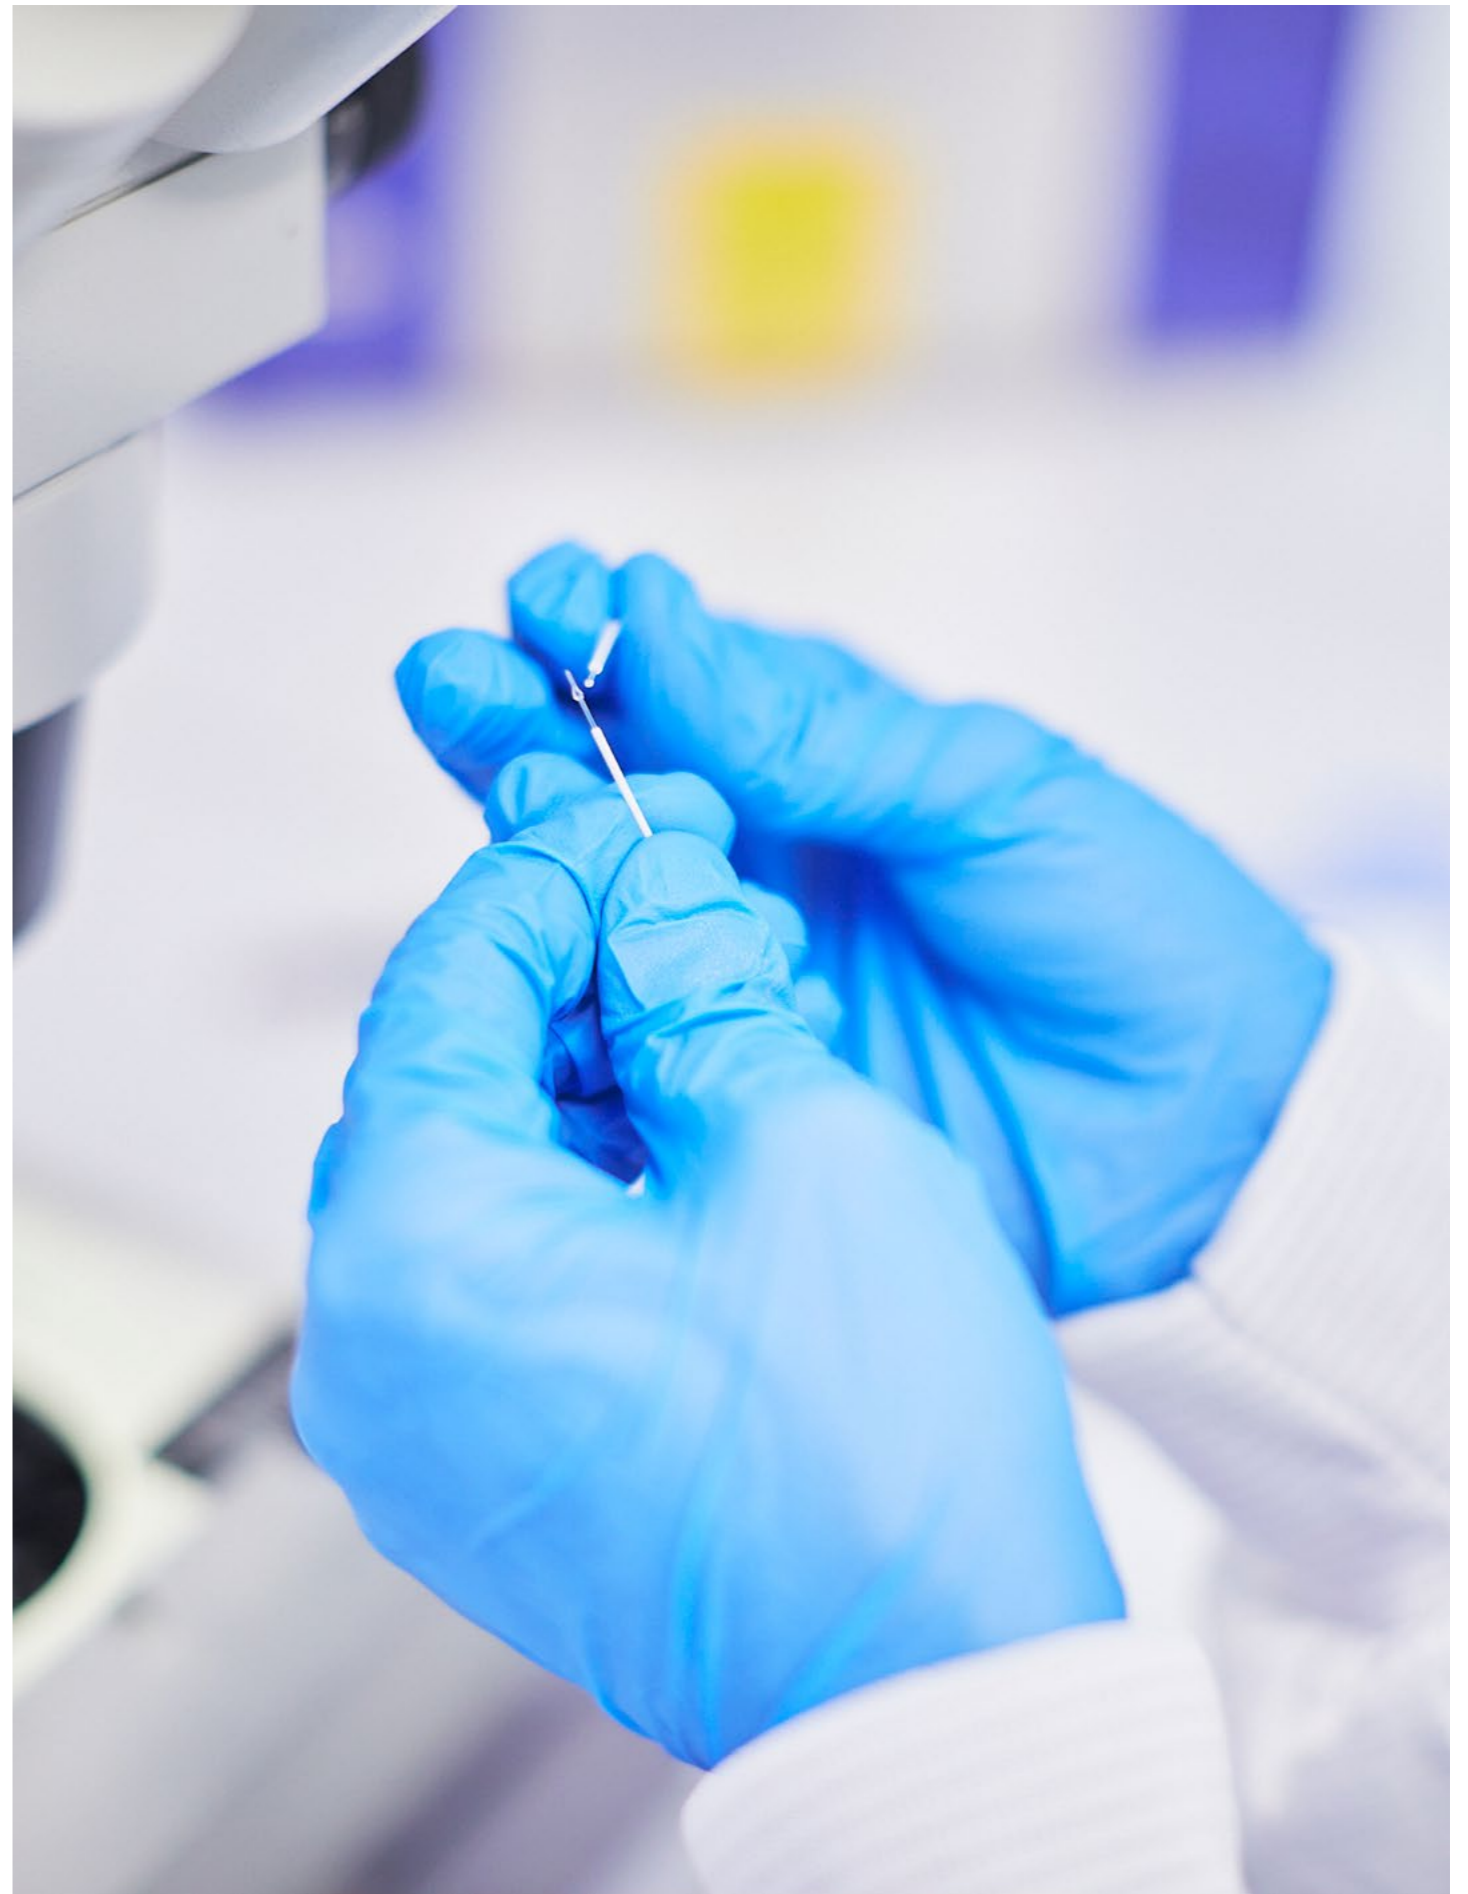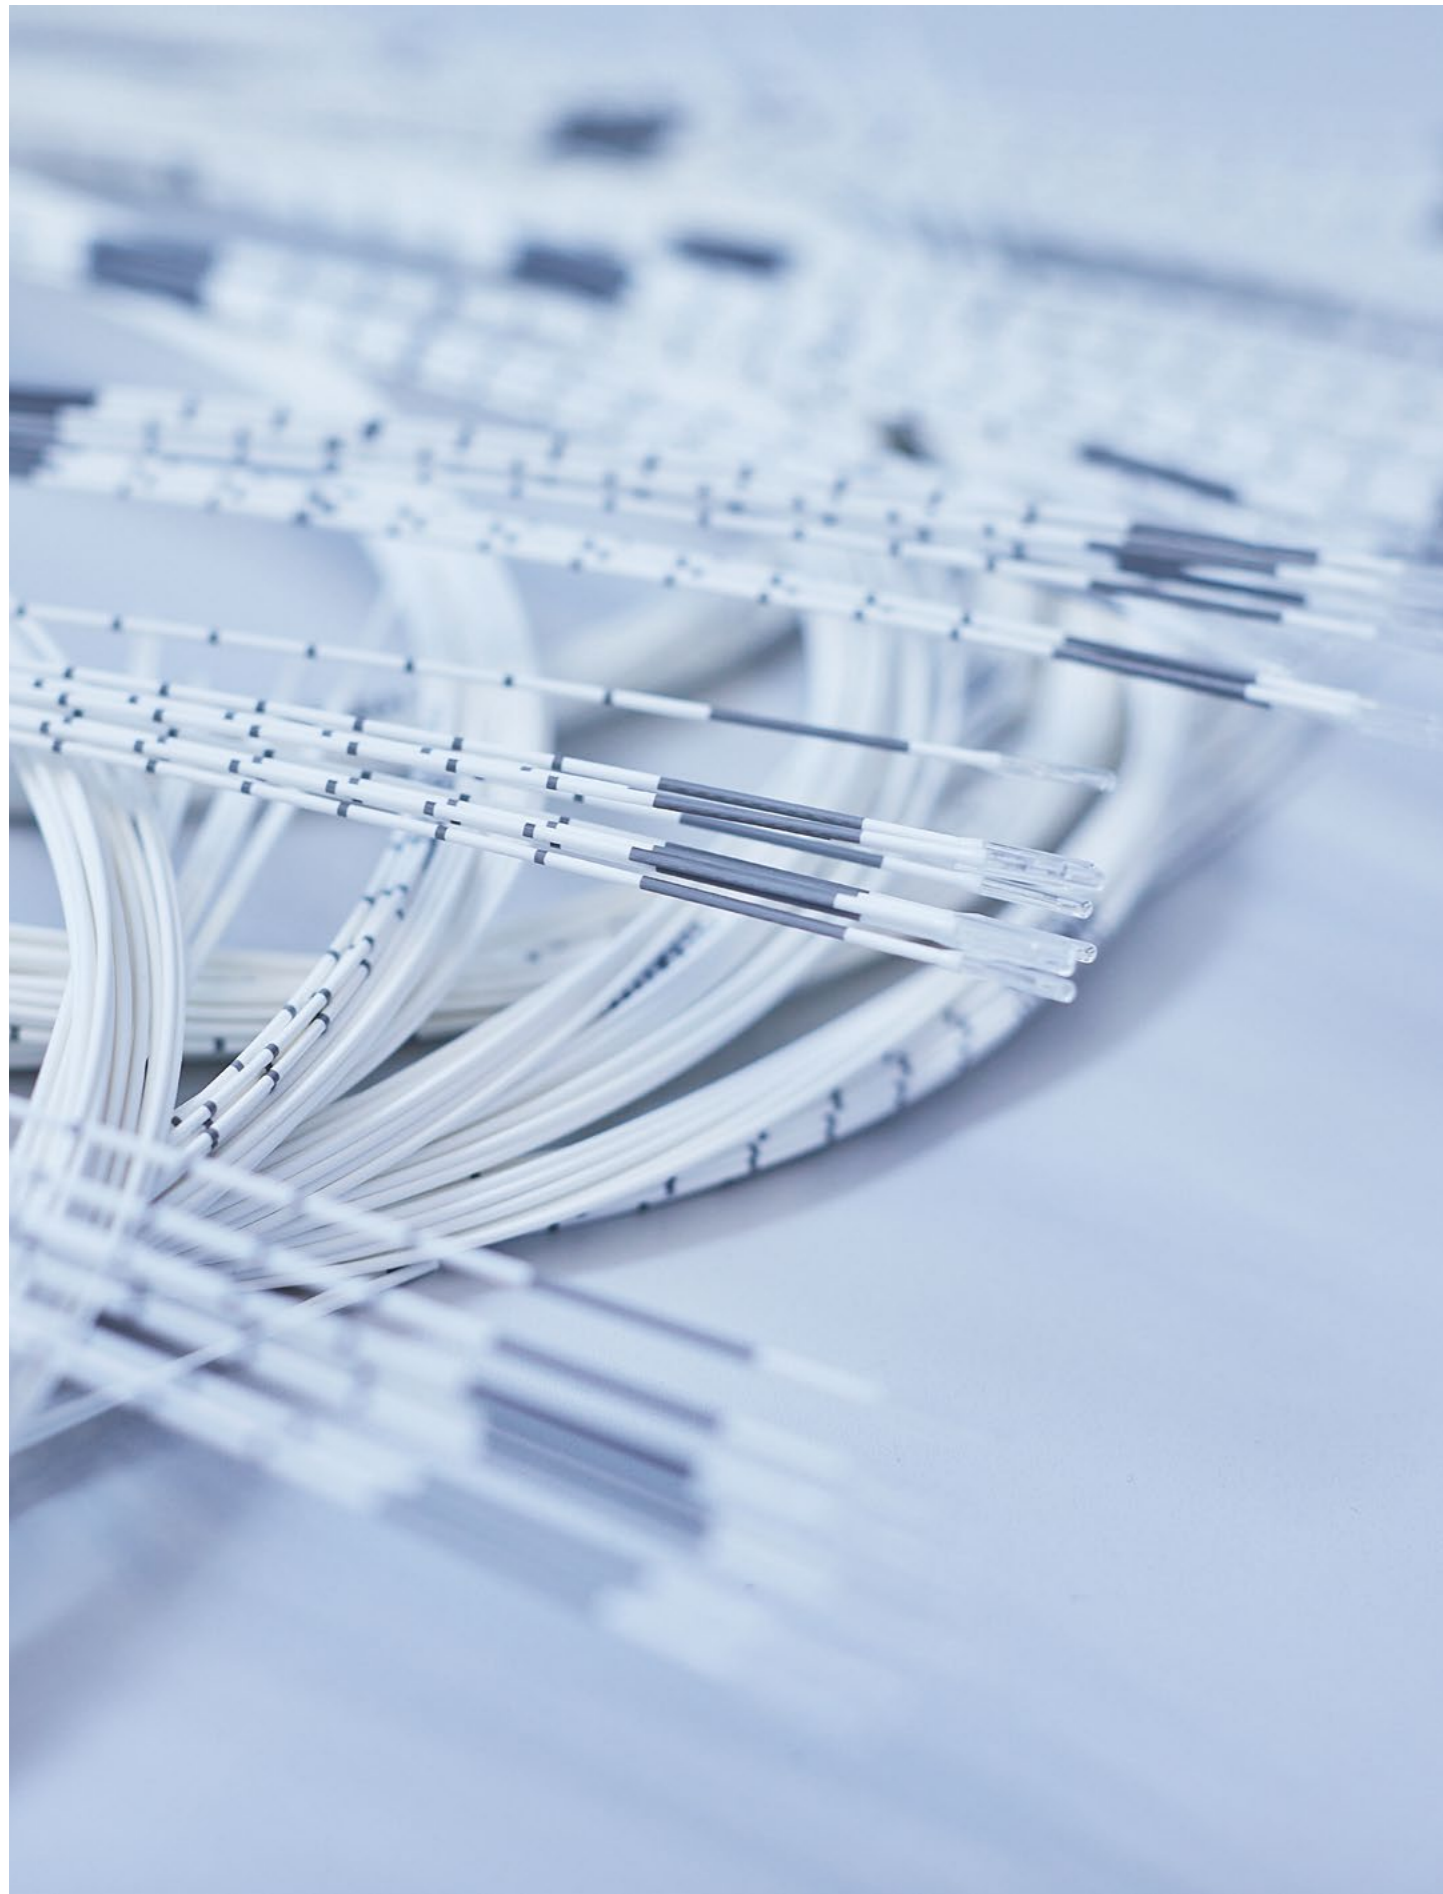

# You are interested in our products?

Please feel free to contact us at any time.

Sales Dept. +49 3375 21 500-26  
sales@oberonfiber.com

Tobias Roth +49 3375 21 500-25  
CEO roth@oberonfiber.com

**OBERON GmbH Fiber Technologies**  
Ludwig-Witthöft-Str. 14, 15745 Wildau b. Berlin